

Features

- Brass construction
- Fixture-mount design
- Intended for toilet installations with 1-1/2" spud coupling connection
- Non-hold open piston technology for accurate activation
- Retrofit models require a control stop and vacuum breaker
- 1.28 gpf (4.85 lpf) flow rate [K-13517 and K-13517-RF]
- 1.6 gpf (6.0 lpf) flow rate [K-13516 and K-13516-RF]


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASSE 1037
- CSA B125.3
- ICC/ANSI A117.1
- CSA B64
- CSA B651
- OBC

**EXPOSED FLUSHOMETER
K-13516**
ALSO K-13516-RF, K-13517,
K-13517-RF

ADA **CSA B651** **OBC**

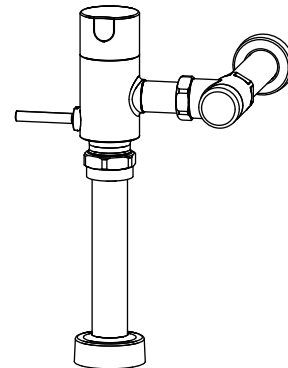

Colors/Finishes

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes
K-13516	Exposed flushometer - 1.6 gpf (6.0 lpf)	<input type="checkbox"/> CP
K-13516-RF	Exposed flushometer (retrofit) - 1.6 gpf (6.0 lpf)	<input type="checkbox"/> CP
K-13517	Exposed flushometer - 1.28 gpf (4.85 lpf)	<input type="checkbox"/> CP
K-13517-RF	Exposed flushometer (retrofit) - 1.28 gpf (4.85 lpf)	<input type="checkbox"/> CP

Product Specification

The exposed manual flushometer shall be made of brass construction. Flushometer shall feature non-hold open piston technology for accurate activation. Flushometer shall have a fixture-mount design. Flushometer is intended for toilet installations with a 1-1/2" spud coupling connection, and retrofit models require a control stop and vacuum breaker. Flushometer shall have a 1.28 gpf (4.85 lpf) flow rate [K-13517 and K-13517-RF] or 1.6 gpf (6.0 lpf) flow rate [K-13516 and K-13516-RF]. Exposed manual flushometer shall be Kohler Model K-_____-CP.

Technical Information

Recommended operating pressure:
25 psi (172 kPa) flowing - 80 psi (552 kPa) static*
* Pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.


Installation Notes

Install this product according to the installation guide.

IMPORTANT! Maintain a 6" (152 mm) minimum critical level above the fixture.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

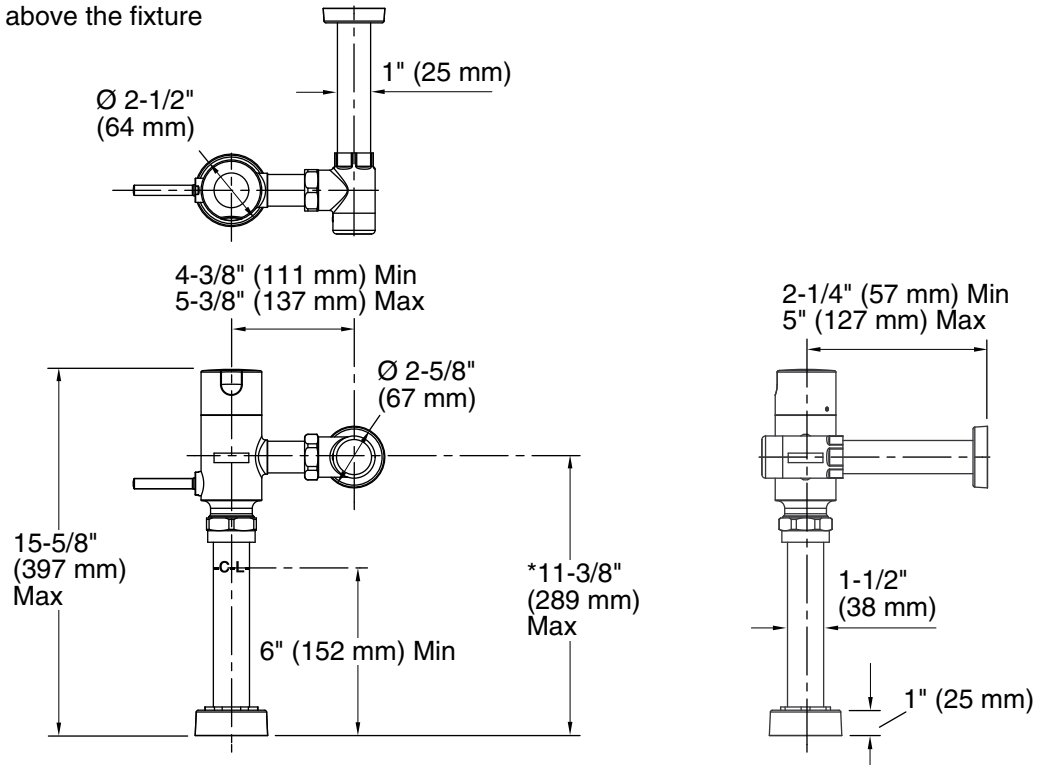

Product Diagram