

#### Features

- 6 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting massage intensity.
- Two sets of 10 backjets target the lower back and shoulders to relieve tension and encourage deep breathing.
- 8 effervescence ports deliver gentle, caressing bubbles.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Built-in heater.
- Remote control.
- Spacious design accommodates up to two bathers.
- Two distinct bathing wells and a cool-off area allow you to create your own experience.
- Two pillows provided for added comfort.

#### Material

- Acrylic

#### Hydrotherapy

- Whirlpool
- Backjets
- Effervescence
- Chromatherapy

#### Installation

- Drop-in or under-mount.

#### Additional Hydrotherapy Options

- Whirlpool - K-1111-H2
- Whirlpool + Effervescence - K-1111-VLN

#### Required Products/Accessories

K-9696 Whirlpool 6-Jet Trim Kit

#### Recommended Products/Accessories

K-588 Under-Mount Installation Kit  
K-1601 Bath/Whirlpool Footstop  
K-7167 Clearflo Bath Drain



#### Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2




**KOHLER® Plastic Baths and Receptors  
Lifetime Limited Warranty  
KOHLER® Hydrotherapy Components  
Five-Year Limited Warranty**


See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*


#### Color Code Description

	0	White
	96	Biscuit
	47	Almond

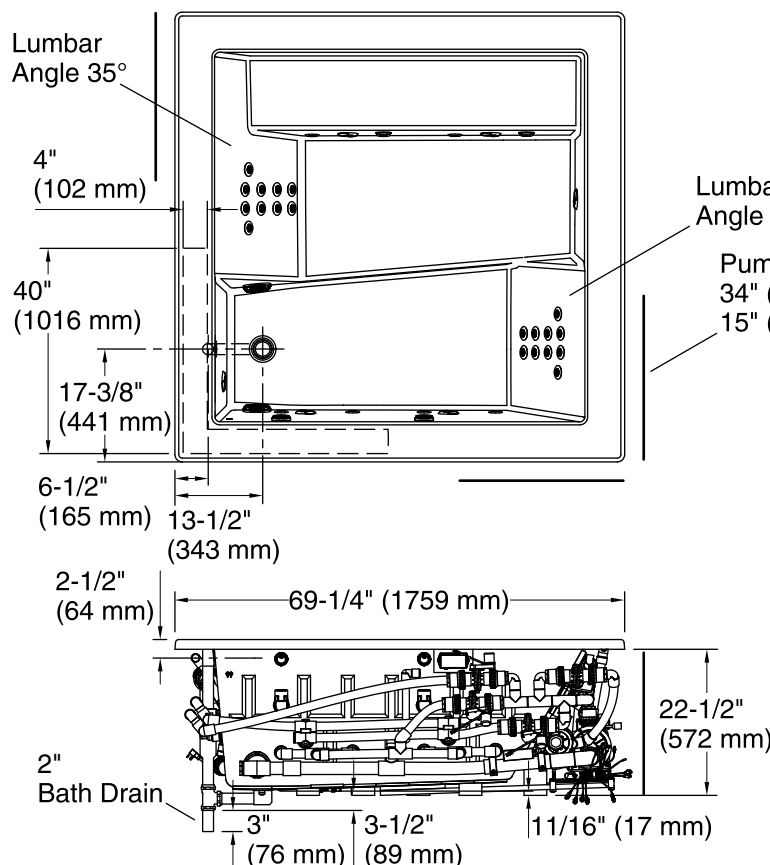

No change in measurements if connected with drain illustrated. (K-7167-AF)

□ Recommended Faucet Location

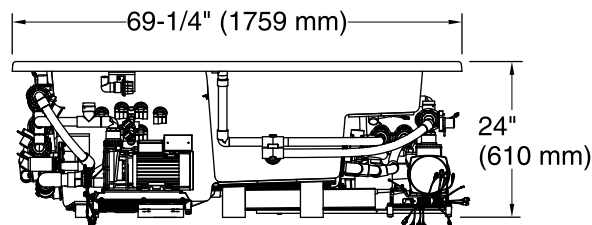

### Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heater: 220-240 V, 20 A, 50/60 Hz

Pump, Heater: 220-240 V, 20 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Installation: Corner, Drop-in, Under-mount

Drain location: End

Basin area, bottom: 45" x 43" (1143 mm x 1092 mm)

Basin area, top: 57" x 57" (1448 mm x 1448 mm)

Weight: 340 lbs (154.2 kg)

Minimum floor load: 54 lbs/ft<sup>2</sup> (263.7 kg/m<sup>2</sup>)

Water depth: 19-1/2" (495 mm)

Water capacity: 170 gal (643.5 L)

Cutout: Drop-in, 68" x 68" (1727 mm x 1727 mm)

Electrical component rating:  
 Pump: 220-240 V, 11 A, 50/60 Hz  
 Heater: 220-240 V, 6.25 A, 50/60 Hz  
 Pump: 220-240 V, 11 A, 50/60 Hz  
 Heater: 220-240 V, 6.25 A, 50/60 Hz

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.