

Archer® 6' Bath K-1125-RA

Features

- Comfort Depth® design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch hath
- Generous 6-foot length provides an incredibly spacious bathing area
- Molded lumbar support and armrests offer extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface
- Right-hand drain.
- Coordinates with other products in the Archer collection.

Material

Acrylic

Installation

Three-wall alcove.

Additional Hydrotherapy Options

- Soaking Bath K-1125-RA
- Soaking Bath + Bask heated surface K-1125-RAW
- BubbleMassage air bath K-1124-GRA
- BubbleMassage air bath + Bask heated surface K-1124-GRAW
- VibrAcoustic K-1124-VBRA
- VibrAcoustic + Bask heated surface K-1124-VBRAW
- Whirlpool K-1124-RA
- Whirlpool + heater K-1124-HR
- Whirlpool + Bask heated surface K-1124-RAW
- Whirlpool + BubbleMassage air bath K-1124-XHGRA

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-9529 Removable Bath Seat



ADA

Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™







Archer® 6' Bath K-1125-RA





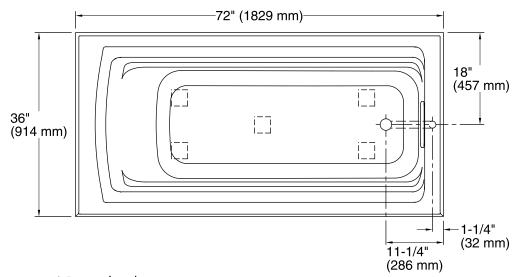

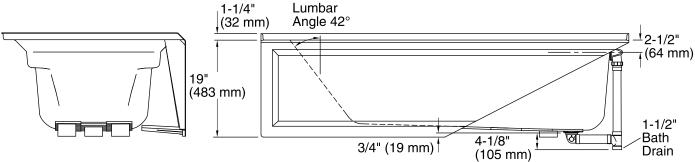

Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Right

Basin area, bottom: 51-3/8" x 21" (1305 mm x 533 mm)
Basin area, top: 64-1/2" x 30-1/2" (1638 mm x 775 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 40 lbs/ft² (195.3 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 72 gal (272.5 L)
Minimum flat for door: 1-9/16" (40 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.



